

## coolcept<sup>3</sup> fleX

StecaGrid 3213, StecaGrid 4013, StecaGrid 5013, StecaGrid 6013

### inverter topology

The coolcept inverter topology was implemented in the single-phase StecaGrid inverters for the first time and achieved maximum efficiency thanks to the innovative circuit. The three-phase coolcept<sup>3</sup>-fleX inverters also enjoy the advantages of this circuit. The three-phase topology is fully reactive-current capable and thus also prepared for future requirements.

### Always symmetrical

The advantage of three-phase feed-in is that the solar power produced is always distributed symmetrically over all three grid conductors and fed into the public grid. This is the case with these inverters over the entire power range. The symmetrical feed-in is entirely in the interest of the energy supply companies and also corresponds to the three-phase consumption in the household.

### Highest efficiency with long service life

The very high efficiency results in a peak efficiency of 98.6%, which means that less power loss has to be generated and dissipated to the environment. These are your yield advantages. Since a three-phase feed-in feeds energy into the grid on at least two phases at any time, intermediate energy storage in the device - as is the case with single-phase feed-in - is not necessary. Thus the coolcept<sup>3</sup>-fleX inverters completely dispense with the electrolytic capacitors required for intermediate storage, which can influence the service life of an electronic device through possible drying out. When using coolcept<sup>3</sup>-fleX inverters, the plant operator therefore has the prospect of a long service life. In addition, a new, unique cooling concept inside the inverters guarantees an even distribution of heat and thus a long service life of the devices.

### Product design and visualization

The StecaGrid has a graphic LCD display with which energy yield values, current performance and operating parameters of the system can be visualised. The innovative menu offers the possibility of an individual selection of the different measured values. A guided, pre-programmed menu ensures smooth, final commissioning of the device.

### assembly

The lightweights with only 12 kg can be easily and safely mounted on the wall. The supplied wall bracket enables simple and very convenient installation. It is also not necessary to open the device for installation. All connections and the DC circuit breaker are accessible from the outside. For the DC connection, the Sunclix mating connectors are included in the scope of delivery.

### Product features


- Highest efficiency
- Three-phase, symmetrical grid feeding
- Simple installation
- Integrated data logger
- Low housing temperature at full load
- Robust metal casing
- Suitable for outdoor installation
- Integrated DC circuit breaker
- Very long service life
- Droop Mode for integration in hybrid systems
- Fixed voltage mode for other energy sources
- Optimised shadow management using global MPP tracking

### Displays

- Multifunction graphical LC display with backlighting
- Animated representation of yield

### Operation

- Simple menu-driven operation
- Multilingual menu navigation

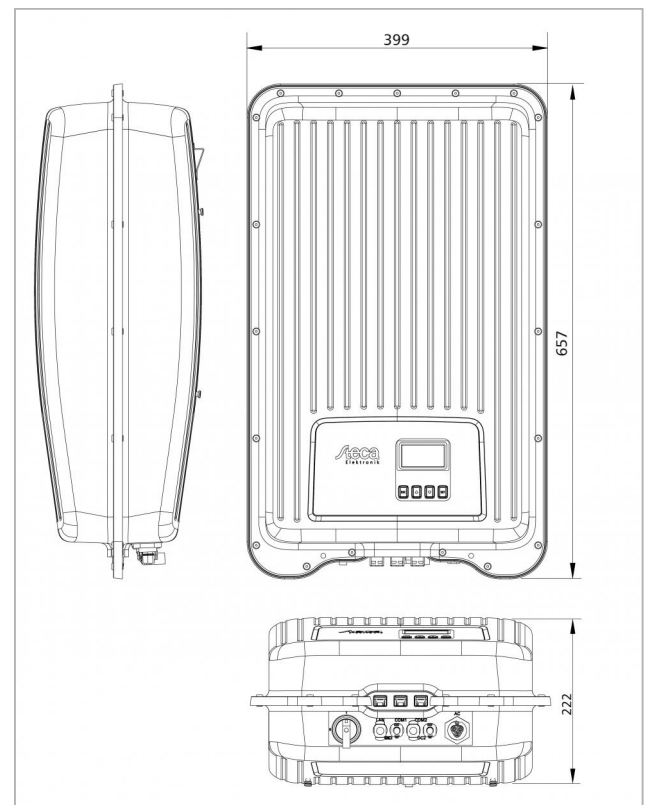

	StecaGrid 3213	StecaGrid 4013	StecaGrid 5013	StecaGrid 6013
<b>DC input side (PV generator)</b>				
Maximum input voltage	1000 V			
MPP voltage range	250 V ... 800 V			
Number of MPP tracker	1			
Maximum input current	11.0 A			
Maximum input power at maximum active output power	3300 W	4100 W	5110 W	6130 W
<b>AC output side (Grid connection)</b>				
Grid voltage	320 V ... 480 V (depending on regional settings)			
Rated grid voltage	400 V			
Maximum output current	7.0 A			
Maximum active power (cos phi = 1)	3200 W	4000 W	5000 W	6000 W
Maximum apparent power	3200 VA	4000 VA	5000 VA	6000 VA
Rated power	3200 W	4000 W	5000 W	6000 W
Rated frequency	50 Hz and 60 Hz			
Frequency	45 Hz ... 65 Hz (depending on regional settings)			
Night-time power loss	< 3 W			
Feeding phases	three-phase			
Total harmonic distortion (cos phi = 1)	< 1 %			
Power factor cos phi	0.8 capacitive ... 0.8 inductive			
<b>Characterisation of the operating performance</b>				
Max. efficiency	98.0 %			
European efficiency	97.0 %	98.0 %	98.0 %	98.0 %
MPP efficiency	> 99.7 % (static), > 99 % (dynamic)			
Own consumption	< 8 W			
Power derating at full power from	50 °C (T <sub>amb</sub> )			
<b>Safety</b>				
Isolation principle	no galvanic isolation, transformerless			
Grid monitoring	yes, integrated			
Residual current monitoring	yes, integrated (The design of the inverter prevents it from causing DC leakage current)			
<b>Operating conditions</b>				
Area of application	outdoors & indoors			
Climate protection class as per IEC 60721-3-4	3K3			
Ambient temperature	-15 °C ... +60 °C			
Storage temperature	-30 °C ... +70 °C			
Relative humidity	0 % ... 100 %, non-condensating			
Noise emission (typical)	29 dBA			
<b>Fitting and construction</b>				
Degree of protection	IP 65			
Overvoltage category	III (AC), II (DC)			
DC Input side connection	Phoenix Contact SUNCLIX (1 pair), mating connector included			
AC output side connection	Wieland RST25i3 plug, mating connector included			
Dimensions (X x Y x Z)	399 x 657 x 222 mm			
Weight	12.0 kg			
Communication interface	RS-485 (2 x RJ45 sockets; connectable to Meteocontrol WEB'log or Solar-Log™, Ethernet interface (1 x RJ45), Modbus RTU (1 x RJ10 socket; connectable to energy counter)			
Integrated DC circuit breaker	yes, compliant with VDE 0100-712			
Cooling principle	temperature controlled fan, variable speed, internal (dustproof)			
Test certificate	see certificate download on the product page			